

VGL 5003

Recessed mounted uplight led wallwasher. Connecting cable and safety plug for portable installation. The used Led technique offers durability and optimal light output with low power consumption.

The main body of the luminaires are extrusion aluminium that absorbs the pressure loads. The luminaires can be driven over by vehicles.

Front frame is 316 grade Stainless steel resistant against high corrosion factors of outdoor conditions.


In order to be easily flush mounted on ground, aluminium mounting outer body is being supplied with the luminaire.

Yere gömme led projektör armatür. Yenilikçi led tekniği sayesinde optimal ve tasarruflu ışık çıkışı. Enerji girişi ve kablo atlaması armatürü açmadan dışardan kolayca sağlanabilir.

Ana gövde ekstrüzyon alüminyum olup araçların tekerlekleri dahil dış basınca dayanıklıdır.

Ön çerçeve 316 kalite paslanmaz olup dış ortamın yüksek korozyon faktörlerine karşı dayanıklıdır.

Armatür yere veya toprağa kolayca montaj edilebilmesi için alüminyum dış montaj gövdesi ile beraber verilmektedir.



- Outdoor on floor luminaire with high protection class.
- Safe structures through the tempered pressure resistant glasses.
- Easy applicable luminaires through the inground recessed boxes.
- Max weight resistance : 2000 Kg.
- Led colour temperatures optionally 2700K, 3000K, 4000K and 5000K.
- 316 grade Stainless steel frame.
- Symmetrical light distribution with 15°, 30° and 45°.
- Can be mounted on ground, pavement and wall surfaces.
- Consists of main body and outer casing.
- All external screws are Stainless steel.


- Yüksek koruma sınıflı dış mekan yer spotu.
- Basınca dayanıklı kalın tamperli camı sayesinde dış mekanda güvenle kullanabilirsiniz.
- Zemin sıva altı kasaları sayesinde uzun ömürlüdür.
- Max. taşıma ağırlığı : 3000 Kg.
- 2700, 3000K, 4000K ve 5000K renk sıcaklığı seçenekleri mevcuttur.
- 316 kalite paslanmaz çerçeve.
- 15°, 30° ve 45° alternatifleri bulunan simetrik ışık çıkışı.
- Toprak zemin, beton zemin ve duvara monte edilebilir.
- Ana gövde ve dış montaj gövdesinden oluşmaktadır.
- Tüm dış vidalar paslanmazdır.



Stainless

VGL 5003

Order Code / Sipariş Kodu	Led Type / Tipi	System Power / Sistem Gücü	mA	No. of Leds / Led Sayısı	Lumen T _c =60° Lümen	Kelvin / Color	Lenght / Uzunluk (A)
O07.WL.16050.07	Cree XT-E	10.50W	350mA	9	1075 lm	2700K	420mm
O07.WL.16050.07	Cree XT-E	10.50W	350mA	9	1130 lm	3000K	420mm
O07.WL.16050.07	Cree XT-E	10.50W	350mA	9	1165 lm	4000K	420mm
O07.WL.16050.07	Cree XT-E	10.50W	350mA	9	1200 lm	5000K	420mm
O07.WL.16050.07	Cree XP-E	7.75W	350mA	9	509 lm	Red / Kırmızı	420mm
O07.WL.16050.07	Cree XP-E	11W	350mA	9	792 lm	Green / Yeşil	420mm
O07.WL.16050.07	Cree XP-E	10.75W	350mA	9	339 lm	Blue / Mavi	420mm
O07.WL.16050.07	Cree XP-E	7.75W	350mA	9	359 lm	Amber	420mm
O07.WL.16050.07	Cree XT-E	21W	350mA	18	2147 lm	2700K	710mm
O07.WL.16050.07	Cree XT-E	21W	350mA	18	2260 lm	3000K	710mm
O07.WL.16050.07	Cree XT-E	21W	350mA	18	2330 lm	4000K	710mm
O07.WL.16050.07	Cree XT-E	21W	350mA	18	2400 lm	5000K	710mm
O07.WL.16050.07	Cree XP-E	15.50W	350mA	18	1018 lm	Red / Kırmızı	710mm
O07.WL.16050.07	Cree XP-E	22W	350mA	18	1583 lm	Green / Yeşil	710mm
O07.WL.16050.07	Cree XP-E	21.50W	350mA	18	678 lm	Blue / Mavi	710mm
O07.WL.16050.07	Cree XP-E	15.50W	350mA	18	718 lm	Amber	710mm
O07.WL.16050.07	Cree XT-E	32W	350mA	27	3270 lm	2700K	1010mm
O07.WL.16050.07	Cree XT-E	32W	350mA	27	3443 lm	3000K	1010mm
O07.WL.16050.07	Cree XT-E	32W	350mA	27	3548 lm	4000K	1010mm
O07.WL.16050.07	Cree XT-E	32W	350mA	27	3635 lm	5000K	1010mm
O07.WL.16050.07	Cree XP-E	23W	350mA	27	1550 lm	Red / Kırmızı	1010mm
O07.WL.16050.07	Cree XP-E	33W	350mA	27	2410 lm	Green / Yeşil	1010mm
O07.WL.16050.07	Cree XP-E	32.50W	350mA	27	1375 lm	Blue / Mavi	1010mm
O07.WL.16050.07	Cree XP-E	23W	350mA	27	1457 lm	Amber	1010mm

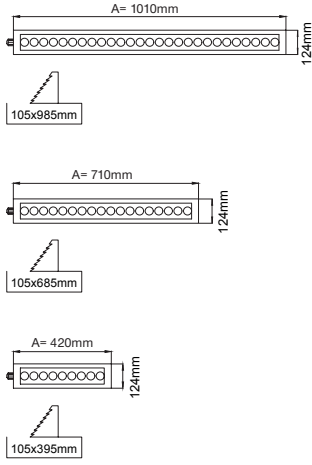

VGL 5003- RGB

Order Code / Sipariş Kodu	Led Type / Tipi	No. of Leds / Led Sayısı	Kelvin / Color	Lenght / Uzunluk (A)
O07.WL.16050.RGB.07	Cree XP-E	9	RGB (R3,G3,B3)	420mm
O07.WL.16050.RGB.07	Cree XP-E	18	RGB (R6,G6,B6)	710mm
O07.WL.16050.RGB.07	Cree XP-E	27	RGB (R9,G9,B9)	1010mm

