




C 90° C 180°


LED A A+ A++ kg CRI 70 CRI 80

CE G IP 65



- Corrosion resistant die cast aluminium alloy.
- Weatherproof and durable silicone rubber gasket.
- Stainless steel screws.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in black, light gray and antracite gray.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Fixing to ground: we recommend to concrete the root of the pole to improve stability.

- Korozyona dayanıklı alüminyum gövde.
- Su geçirmezliği sağlayan plastik conta.
- Paslanmaz çelik vida.
- Tamperli cam.
- Su geçirmezliği sağlayan plastik conta.
- Ultraviyole ışımaya dayanıklı beyaz, gri, saten gri ve siyah elektrostatik toz boyalı.
- Çift katmanlı polyester toz boyası sayesinde korozyona ve tuza dayanıklı gövde.
- Yere montaj: armatürün alt kısmına daha güvenli montaj için düz beton yüzey oluşturulması tavsiye edilir.

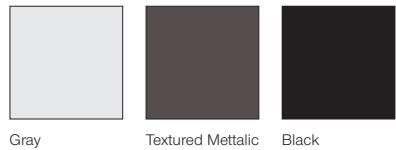

Gray

Textured Metallic
Dark Gray

Black

VGL 7004

LED	Power Led	
Led Power / Led Gücü	2x12W	
System Power / Sistem Gücü	2x15W	
Lumen Output from Fixture / Armatür Çıkış Lümeni	2700K 3000K 4000K 5000K	2x1385 2x1450 2x1500 2x1550
CRI>80		

