
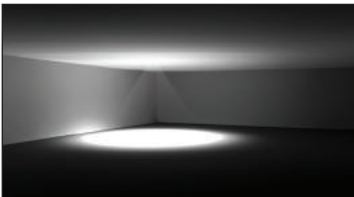


- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- High efficient opal diffuser.
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- IP44 rating possible with integration of extra silicon gasket upon request.
- Emergency kit system can be integrated.

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişi.
- Akıllı soğutma tasarımı.
- 1-10V, DALI ve faz dim seçenekleri bulunmaktadır.
- Yüksek verimli opal diffüzörlü.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bağlı özel renk seçenekleri mevcuttur.
- Ekstra silikon conta ilavesi ile koruma sınıfı IP44'e yükseltilebilir.
- Acil aydınlatma kit sistemi uygulanabilir.

VGL 8017

LED	SMD LED	
Led Power / Led Gücü	29W	
System Power / Sistem Gücü	31W	
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	2885
	3000K	2976
	3500K	3065
	4000K	3155
	5000K	3252
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>90	2700K	2625
	3000K	2700
	3500K	2785
	4000K	2865
	5000K	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	✓	
1-10V Dimming Option / 1-10V Dim Seçeneği	✓	
Dali Dimming Option / Dali Dim Seçeneği	✓	

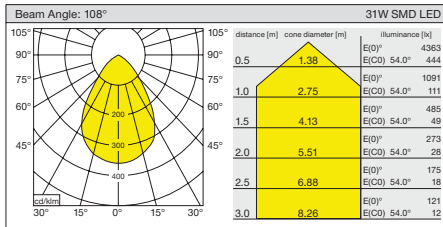

Low inner depth of the luminaire creates advantage to apply this range to ceilings with low depth.

Armatür arka yüksekliği düşük olması sayesinde düşük tavan içi yüksekliğine sahip alanlarda bile kolayca uygulanabilir.